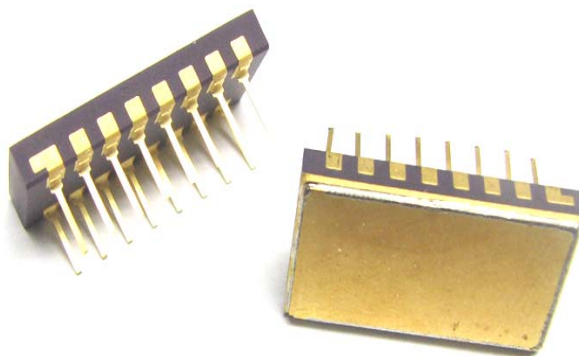


TECHNICAL DATA
DATA SHEET 563, REV. E**Transient Voltage Suppressor / Data Line Transient Suppressor**

This series of TVS devices is packaged in a ceramic, dual in-line, hermetically sealed package. These components offer 15 protective devices per package; unidirectional or bidirectional, common buss connections. The dual in-line is designed for data line protection at the PC board level. TTL and MOS voltages are available for protection of input/output data circuits.

FEATURES

- ◆ Unidirectional or Bidirectional
- ◆ Mil-Std-461 Compatible
- ◆ 1300W Peak Pulse Power (8/20 μ s)
- ◆ ESD Protection > 40KV
- ◆ Multiple TVS Array
- ◆ Dual In-Line, 16 PIN Hermetic Package
- ◆ μ P / mP Compatible Package
- ◆ Voltage Range of 5V to 30V Available
- ◆ Common Buss Configuration
- ◆ Military Environment Capability

**MAXIMUM RATINGS**

Rating	Condition	Minimum	Maximum	Units
Peak Pulse Power Dissipation	@ 25°, (8x20 μ s)	-	1300	Watts
Clamping (t_{clamping})	0 Volts to V_{BR} - Unidirectional - Bi-directional	-	$< 1 \times 10^{-12}$ $< 5 \times 10^{-9}$	Seconds
Operating & Storage Temp.	N/A	-55	+ 150	°C
Forward Surge Current	1/120 sec. @ 25°C (unidirectional)	-	10	Amps

MECHANICAL CHARACTERISTICS

- ◆ Hermetically sealed package
- ◆ Case: Ceramic, 16 pin dual in-line (.300" row spacing)
- ◆ Polarity: Pin No. 1 marked with a flag on lead and a dot on top of package.
Body marked with type number.
- ◆ Weight: 3.5 grams (approx.)

SCREENING

- ✓ Standard Catalog Screening
- ✓ Option H1: 100% JANTX Screening
- ✓ Option H2: 100% JANTX Screening with Group B testing

DLZ5 thru DLZ30
DLZ5A thru DLZ30A
DLZ8C thru DLZ30C
DLZ8CA thru DLZ30CA


SENSITRON

TECHNICAL DATA


DATA SHEET 563, REV. E

Part Number	Reverse Stand-Off Voltage V_{WM} Volts	Minimum Breakdown Voltage @ 1 mA $V_{(BR)}$ Volts	Maximum Clamping Voltage @ $I_{PP1} = 1A$ (8x20 μ s) V_{c1} Volts	Maximum Clamping Voltage @ $I_{PP2} = 10A$ (8x20 μ s) V_{c2} Volts	Maximum Reverse Leakage @ V_{WM} I_D μA	Maximum Capacitance @ 0V, 1MHz C pF	Maximum Voltage Temperature Variation of $V_{(BR)}$ mV/C
Unidirectional							
DLZ5	5.0	6.0	10.2	12.5	200	880	5
DLZ5A	5.0	6.0	9.5	10.6	200	880	5
DLZ12	12	13.3	21.1	26.0	2	440	18
DLZ12A	12	13.3	19.1	23.5	2	440	18
DLZ17	17	19.2	30.4	37.4	2	330	20
DLZ17A	17	19.2	27.5	33.9	2	330	20
DLZ24	24	26.7	42.3	52.1	2	275	31
DLZ24A	24	26.7	38.3	47.2	2	275	31
DLZ30	30	33.3	52.8	65.0	2	220	39
DLZ30A	30	33.3	47.8	58.8	2	220	39
Bidirectional							
DLZ8C	8.0	8.5	13.4	16.6	30	440	9
DLZ8CA	8.0	8.5	12.2	15.0	30	440	9
DLZ13C	13	14.4	22.8	28.1	4	385	18
DLZ13CA	13	14.4	20.6	25.4	4	385	18
DLZ19C	19	21.6	34.2	42.1	4	275	24
DLZ19CA	19	21.6	31.0	38.1	4	275	24
DLZ30C	30	33.3	52.8	65.0	4	165	39
DLZ30CA	30	33.3	47.8	58.8	4	165	39

TYPICAL UNIDIRECTIONAL SCHEMATIC

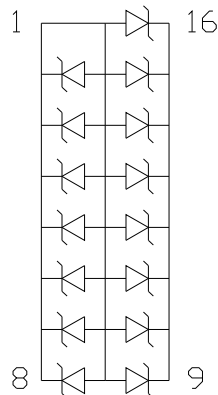

TYPICAL BIDIRECTIONAL SCHEMATIC

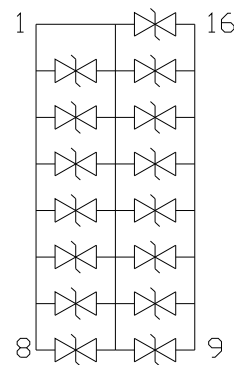


DLZ5 thru DLZ30
DLZ5A thru DLZ30A
DLZ8C thru DLZ30C
DLZ8CA thru DLZ30CA

SENSITRON

TECHNICAL DATA

DATA SHEET 563, REV. E

MECHANICAL DIMENSIONS: In Inches / mm

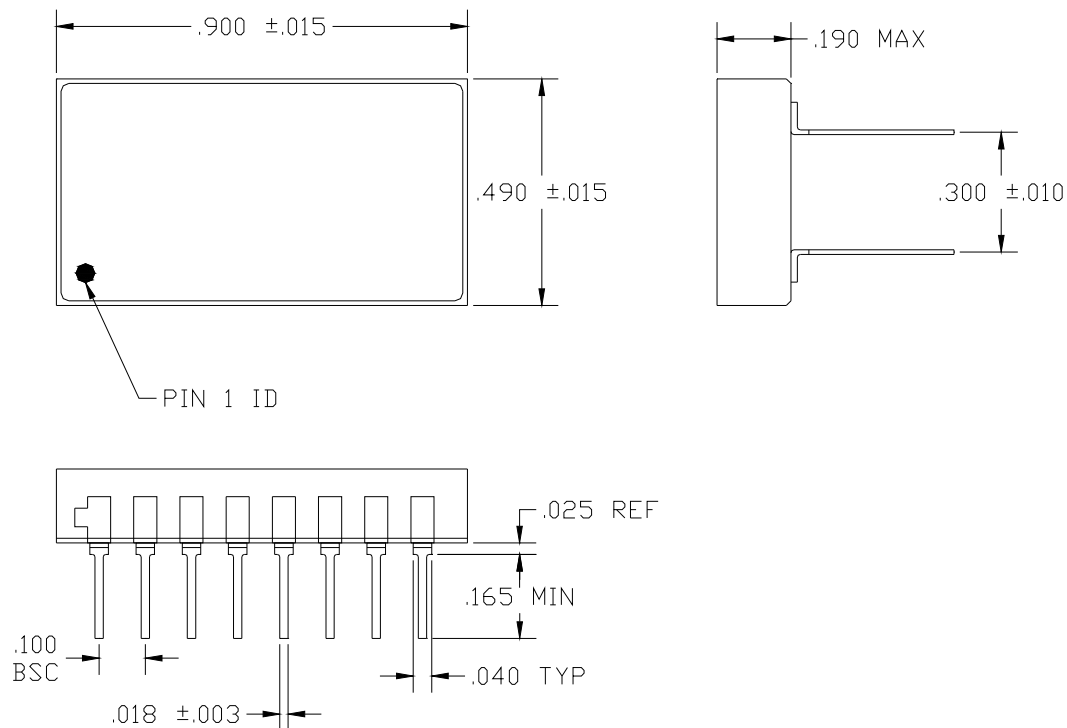

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.